

SHEET METAL RIDGE CAP


PREMIUM WHITE ELASTOMERIC FINISH COAT

UNIFLEX BASE COAT

UNIFLEX ACRYLIC PATCHING CEMENT

Z-CLOSURE  
- PARTIALLY SHOWN FOR CLARITY

STANDING SEAM  
METAL ROOF PANELS

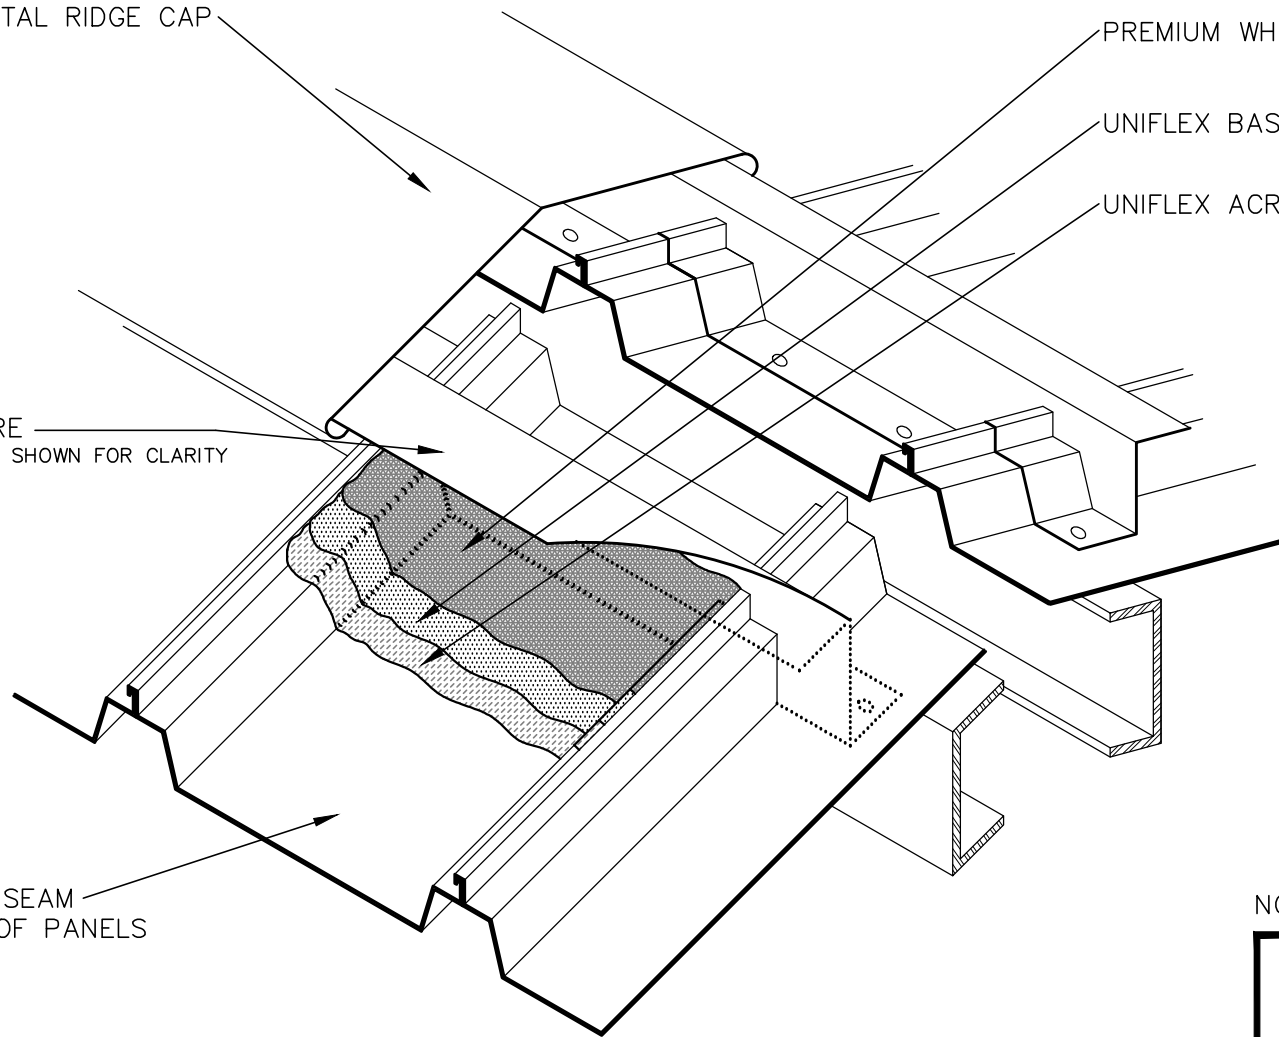

NOTES:

1. SURFACE MUST BE CLEAN, DRY AND IN SOUND CONDITION. REMOVE ALL OIL, GREASE, DUST, DIRT, LOOSE RUST AND OTHER FOREIGN MATERIAL TO ENSURE ADEQUATE ADHESION.
2. APPLY UNIFLEX RUST INHIBITIVE METAL PRIMER PRIOR TO REPAIRS AND COATING IF METAL SURFACE OXIDATION IS PRESENT
3. REFER TO APPROPRIATE UNIFLEX PREMIUM ELASTOMERIC SPECIFICATION.



UNIFLEX PREMIUM ELASTOMERIC SYSTEM

STANDING SEAM RIDGE CAP DETAIL

DATE: 3/25/11

SHEET NO:

MT-R-2

NOT TO SCALE